



金冠管业

CIXI JINGUAN PIPE FACTORY

皓冉燃具

NINGBO HAORAN GAS APPLIANCE CO.,LTD

地址：中国浙江省宁波市慈溪长河工业园区二横路77号

电话：+86 13732168621

邮箱：cnjggas@163.com

网址：www.cnjggas.com

www.chinesehose.com.cn www.cxjgzg.1688.com

Add : NO. 77, Erheng Road, Changhe Industrial Zone, Cixi,
Ningbo, Zhejiang Province, P.R. CHINA

Tel: +86 13732168621

Email: cnjggas@163.com

Web : www.cnjggas.com

www.chinesehose.com.cn www.cxjgzg.1688.com



宁波皓冉燃具有限公司

NINGBO HAORAN GAS APPLIANCE CO.,LTD

慈溪金冠管业

CIXI JINGUAN PIPE FACTORY



公司简介

■ 慈溪金冠管业成立于2008年，厂房面积10000平方米，经过数年的努力，现已发展成为国内外颇具影响力的一家煤气类产品综合生产商，专业从事于PVC软管，煤气炉具，阀门配件的研发、生产和销售。

■ 本公司坚持以科技发展为动力，依靠高科技人才来发展企业，向高新领域发展，设备先进，技术力量雄厚，研发能力强，可根据客户的特殊技术要求进行特殊研制生产。公司始终遵循“高品质的产品和合理的价格”，以“诚信，创新，热情，踏实”的服务理念为客户提供专业的产品和服务。

■ 公司现有职工50余人，软管生产流水线8套，主要生产PVC塑料软管。数控机床四十多台，大小冲床十余台。近年来公司先后引进了一系列先进的设备，包括PVC挤出机，PVC造粒机，不锈钢挤出机，退火机，数控机床，冲床，点焊机，抛丸机等。秉着质量第一的原则，通过专业的生产，严格的质量控制，反复的实验测试，我们努力满足客户的需求。此外公司现有CE、SGS、FDA、RoHS等产品认证，产品远销东南亚，中东，非洲，南美，北美，欧洲，大洋洲等国家和地区，并深受客户的信赖和好评。

■ 本公司将以先进的产品，优秀的产品质量，良好的技术服务，有竞争力的价格来面对国内外市场和用户，欢迎广大采购商前来询价与参观。

Company Profile

■ Cixi Jinguan, established in 2008, covers an area of 10,000 square meters, is a professional manufacturer engaged in the research, development, production, sale and service of LPG gas application products, like PVC LPG Gas Pipe, Gas stove burner, LPG valves and other accessories.

■ Our experienced staff members are always available to discuss your requirements and ensure full customer satisfaction. Our company always abides by the business strategy of "high-quality products & reasonable price", the service concept of "showing respect to you & trying my best", and the professional spirit of "honesty, innovation, enthusiasm, sureness" to provide customers the best products and services.

■ Our company have more than 50 employees, 8 sets of hose production lines, mainly producing PVC plastic hose. There are more than 40 CNC machine tools and 10 more punch presses. In recent years, the company has introduced a series of advanced equipment, including PVC extruder, PVC granulator, stainless steel extruder, annealing machine, CNC machine, punch, spot welding machine, shot blasting machine, etc. Besides we have applied a series of certification as SGS, FDA, ROHS, CE, SONCAP etc, which improved the quality to export to Europe, America, Africa, etc.

■ Quality always comes first; we strive for meeting customer requirements more precisely by professional production, strict quality control, repeatedly tested by experiment.

■ Selling well in all cities and provinces around China, our products are also exported to clients in such countries and regions as Southeast Asia, Africa, South America, Middle East, Europe. We also welcome OEM and ODM orders.



HR-ZP01A



HR-ZP01B



HR-ZP01C



HR-ZP01D



HR-ZP02



HR-ZP03



HR-ZP04



HR-ZP05



HR-LT01



HR-LT02



HR-LT03



HR-LT04



HR-LT05



HR-LT06



HR-LT07



HR-LT08



HR-LT09



HR-LT10



HR-LT11



HR-LT12



HR-LT13



HR-BC-01



HR-BC-02



HR-BC-03



HR-BC-04



HR-BC-05



HR-BC-06



HR-BC-07



HR-BC-08



HR-BC-09



HR-BC-10



HR-BC-11




HR-V01A



HR-V01B



HR-V02A



HR-V02B




HR-V03A



HR-V03B



HR-V04A



HR-V04B



HR-V05A



HR-V05B



HR-V06A



HR-V06B



HR-V07A



HR-V08



HR-V09



HR-V17



HR-V18



HR-V19



HR-V10



HR-V11



HR-V12



HR-V20




HR-V21




HR-V22



HR-V13

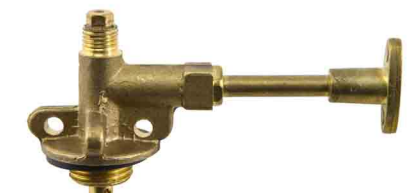

HR-V14

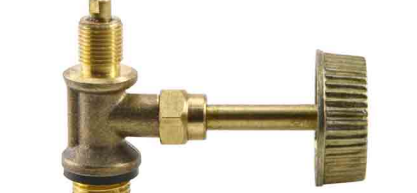

HR-V15



HR-V23



HR-V24



HR-V25



HR-V16A



HR-V16B



HR-V16C



HR-V26



HR-V27



HR-V28



HR-V29



HR-V30



HR-ZJ07



HR-ZJ01



HR-ZJ02



HR-ZJ03



HR-ZJ04



HR-ZJ05



HR-ZJ06



HR-JY01



HR-JY02



HR-JY03A



HR-JY03B



HR-JY04



HR-JY05



HR-JY06



HR-JY07



HR-JY08



HR-JY09



HR-JY10



HR-JY11



HR-JY12



HR-JY13




HR-JY14



HR-JY15



HR-JY16

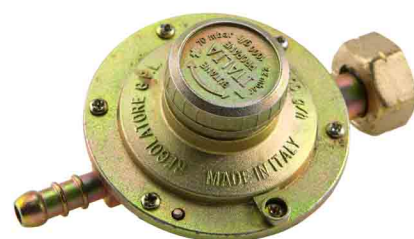

HR-JY17



HR-JY18



HR-JY19



HR-JY20



HR-JY21



HR-JY22



HR-JY23



HR-JY24



HR-JY25



HR-JY26



HR-JY27



HR-JY28



HR-JY29



HR-JY30



HR-JY31



HR-JY32



HR-JY33



HR-JY34



HR-JY35



HR-JY36



HR-JY37



HR-JY38



HR-JY39



HR-GPD-2



HR-GPD-3



HR-GPD-5



HR-GPN-3A



HR-GPN-3B



HR-GPN-5A



HR-GPN-5B



HR-GPN-5C



HR-GPN-6



HR-GPN-10



HR-GPN-12.5A



HR-GPN-12.5B



HR-GPN-12.5C



HR-GPNF-5



HR-GPS-05



HR-GPS-20



HR-GPS-30



HR-GPS-50



HR-GA01



HR-GA02



HR-GA03



HR-GA04



HR-GA05



HR-GA06



HR-GA07



HR-GA08



HR-GA09





HR-RG-01



HR-RG-02



HR-RG-03



HR-RG-04



HR-RG-05



HR-RG-06



HR-RG-07



HR-RG-08



HR-RG-09



HR-RG-10



HR-RG-11



HR-RG-12



HR-RG-13



HR-RG-14



HR-RG-15



HR-RG-16



HR-RG-17



HR-RG-18

用途： 主要用于家用燃具灶具输送液化气、天然气等燃气。

材料： 内层黑色或其他颜色软PVC。增强层采用高强度合成纤维缠绕增强。外层红色或黄色软PVC。

性能特征： 耐老化、耐油、耐酸碱、耐腐蚀，使用寿命长，管体承压高，柔软，轻便，弯曲性能好，外观光亮美观。

温度范围： -5°C~+65°C (+23°F to +149°F)

Application： Mainly used for conveying gas for household fuel system.

Tube： Black or other colors flexible PVC.

Reinforcement： High Tensile synthetic fiber spiraled.

Cover： Red or yellow flexible PVC, surfaces of cover can be smooth and corrugated.

Characteristics： Weather resistant, oil resistant, corrosion resistant. It is of pressure bearable, flexible, light in weight, anti-bending and nice bright surface.

Temperature range： -5°C~+65°C (+23°F to +149°F)



HR-RG-19



HR-RG-20



HR-RG-21



HR-RG-22



HR-RG-23



HR-RG-24

内径 Inside Diameter		外径 Outside Diameter (mm)	工作压力 Working Pressure (Mpa)	爆破压力 Burst Pressure (Mpa)	最大长度 Length (m)	参考重量 Weight (gram/m)	包装尺寸 Packing Measurement D*H(mm)
英制 Inch	公制 mm						
1/4"	6	13	2	6	100	146	390*170
	7	13	2	6	100	132	390*170
5/16"	8	14	2	6	100	145	410*190
	8.5	14	2	6	100	136	410*190
	8.5	14.5	2	6	100	152	410*190
3/8"	9	15	2	6	100	158	420*180
	9	16	2	6	100	192	440*200
	9.5	16	2	6	100	182	440*200
	10	16	2	6	100	171	440*200
	10	17	2	6	100	208	460*210



用途： 广泛用于食品、卫生、工业、农业和水族器材等行业低压条件下输送水、油、低浓度化学品和其他液体。

软管： 由无毒透明软PVC制成。

性能特征： 柔软、透明、耐腐蚀、使用广泛。

温度范围： -5°C~+65°C (+23°F to +149°F)

Application： Widely used for conveying water, oil, weak chemicals and other liquids under low pressure condition in foodstuff, sanitary, industry, agriculture and aquatic animals' equipment etc.

Tubing： Made from non-toxic clear flexible PVC.

Characteristics： Flexible, transparent and corrosion resistant, and widely used.

Temperature range： -5°C~+65°C (+23°F to +149°F)





HR-WH01



HR-WH02



HR-WH03



HR-WH04



HR-WH05



HR-WH06



HR-WH07



HR-WH08



HR-WH09



HR-WH10



HR-WH11



HR-WH12



HR-WH13



HR-WH14



HR-WH15

用途： 主要用于园林洒水、灌溉和日常生活中的清洗等。

材料： 内层为黑色或其他颜色软PVC，增强层采用高强度合成纤维缠绕增强，外层绿色或其他颜色软PVC

性能特征： 柔软、光亮，具有良好的抗天候老化、耐臭氧、抗紫外线等性能。

温度范围： - 5°C~+65°C (+23°F to +149°F)

Application： Mainly used for watering and irrigation for garden and cleaning.

Material： Inner tube black or other colors flexible PVC, High Tensile synthetic fiber spiraled, Green or other colors flexible PVC as cover..

Characteristics： Flexible, glossy. It is of good resistance to weather, ozone and ultraviolet.

Temperature range： -5°C~+65°C (+23°F to +149°F)



内径 Inside Diameter		外径 Outside Diameter (mm)	工作压力 Working Pressure (Mpa)	爆破压力 Burst Pressure (Mpa)	最大长度 Length (m)	参考重量 Weight (gram/m)	包装尺寸 Packing Measurement D*H(mm)
英制 Inch	公制 mm						
3/8"	10	14	0.6	1.8	100	98	460*130
1/2"	12	16	0.6	1.8	100	115	500*190
	13	17	0.5	1.5	100	123	500*190
	13	18	0.6	1.8	100	159	500*190
5/8"	15	20	0.6	1.8	50	179	430*180
	16	20	0.5	1.5	50	147	430*180
	16	21	0.6	1.8	50	189	430*180
3/4"	19	24	0.6	1.8	50	220	500*180
	19	25	0.6	1.8	50	270	500*180
1"	25	30	0.5	1.5	50	281	580*170
	25	31	0.5	1.5	50	343	580*170



用途： 广泛用于航空、电子、石油、化工、机械、电力、医疗、烤箱、食物和其他工业部门，是良好的电绝缘密封，液体运输材料。

软管： 由无毒无味硅胶制成。

性能特征： 无毒、无味、柔软、透明，可重复使用，耐冷热、耐有机液体。

温度范围： -51℃~+238℃

Application : Widely used in aviation, electronic, petroleum, chemical, mechanical, electrical, medical, oven, food and other industrial department of the good electrical insulating sealing, liquid transportation materials.

Tubing: Made from non-toxic flexible silicone.

Characteristics : Non-toxic and odorless, soft and flexible, translucent, reusable, highly resistant to heat and cold, highly resistant to organic fluids.

Temperature range : -51°C~+238°C

